

Fair bandwidth usage among service subscribers

PacketController QoS solution can mitigate excessive bandwidth consumption by high-usage users, thereby promoting equitable and efficient utilization of network resources. By specifying source and destination IP addresses and leveraging Deep Packet Inspection (DPI) to identify application types, it becomes possible to impose limits on both uplink and downlink bandwidth, as well as the number of concurrent connections.

By leveraging Deep Packet Inspection (DPI), organizations can gain application-level visibility to classify over 3,000 applications across more than 40 categories. This provides granular insight into network traffic—including encrypted traffic—which is essential for enforcing effective policies. Analyzing these traffic trends facilitates strategic network planning, delivers deeper business intelligence, and supports enhanced compliance with Law Enforcement Agency (LEA) requirements, while also opening up opportunities for service monetization.

Leveled Fairness Control

By restricting the bandwidth of high-usage subscribers during peak periods, telecommunications carriers can ensure fairer distribution of network resources, ultimately boosting customer satisfaction. Additionally, this approach allows for tiered control, enabling carriers to apply differentiated policies to various subscriber groups.

Effective use of network resources

Facilitates optimal network utilization through granular control of aggregate traffic flows. This includes managing bandwidth, session counts, and packets per second for both upstream and downstream traffic.

Application Identification and Control

Deep Packet Inspection technology offers comprehensive application awareness by identifying and visualizing applications currently running on the network, monitoring their operational status, and empowering administrators to enforce per-application bandwidth and communication policies.

IPv4 to IPv6 Transition

Provides the measurement and management of IPv4 and IPv6 traffic simultaneously for operators of all access technologies.

Carrier-Grade Performance

- 1GE, 10GE, 25GE, 40GE, 100GE and 400GE ports
- Up to 520Gbps on one single hardware appliance
- Up to 750M concurrent sessions on one single hardware appliance
- N+M Clustering to support 4TB throughput

Bandwidth Management

- Rate limit on throughput, packet per second, connections
- Time based bandwidth management
- Monthly quota management
- DPI Management
- Web Filtering (GEO and Websites)
- High performance logging
- Subscriber Portal

Networking

- Layer 2/Layer 3 support
- BGP+
- BGP Multi-path (ECMP)
- IS-IS v4/v6, OSPF v2/v3
- RIP v2/ng
- VLAN (802.1Q, QinQ)
- BFD
- Static routes & path monitoring
- Policy based routing (PBR)
- Link aggregation (802.1AX), LACP
- VXLAN
- NVGRE
- IPv4 NAT/NAPT
- IPv6 NPAT
- ACL
- Port mirroring

Flexible Licensing

- "Pay-as-you-grow" license on hardware
- From 200Mbps to 520Gbps

Extensibility

- N+M Clustering (Active-Standby, Active-Active)
- Multitenancy (Partition) Support
- Partition Support

DDoS Protection

- Flood attack protection: SYN cookies, TCP/UDP/ICMP flood protection, DNS/HTTP flood protection
- Protocol attack protection: invalid packets, anomalous TCP flag combinations, packet size validation (ping of death)
- Resource attack protection: slowloris, slow POST, sockstress, fragmentation


Management/Monitoring

- Dedicated management port (CLI, Telnet, SSH, WUI)
- Dedicated management routing table
- Dedicated control CPU
- SNMP v1/2/3
- RBAC with AAA (LDAP, Radius, TACACS+ support)
- 802.1ab LLDP
- sFlow/IPFIX/Netflow v9
- Syslog

PacketController Hardware Model

PacketController Networks provides high performance hardware models to meet your requirements.

All PacketController hardware platforms (Up to 520Gbps throughput) are designed with high performance in mind.

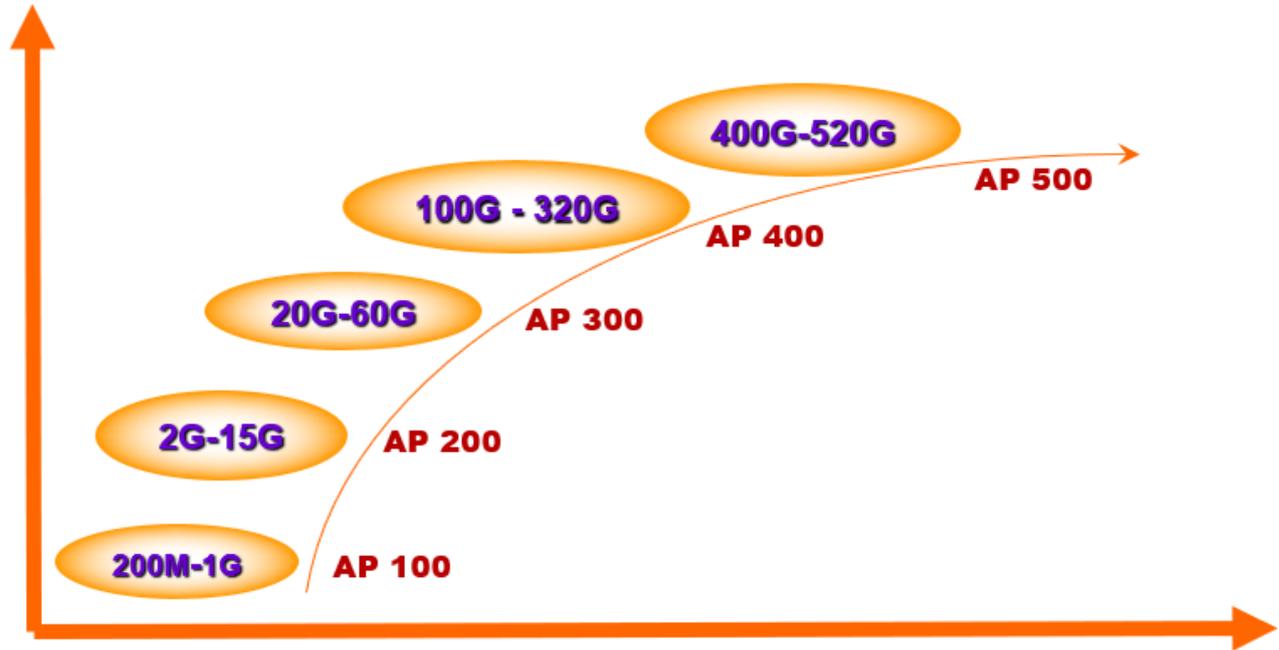

Hardware Platform Specification

AP100

AP200

AP300

AP400

AP500

Available License					
Throughput	200Mbps/500Mbps/1Gbps	3/5/10/15 Gbps	20/30/40/60 Gbps	100/200/240/320 Gbps	400/520 Gbps
Performance					
Throughput	1Gbps	15Gbps	60Gbps	320Gbps	520Gbps
Full TCP CPS	50K	450K	1.5M	2.2M	7.5M
Concurrent Sessions	6M	64M	128M	256M	750M
Rules	16K	64K	128K	128K	128K
Partitions	8	32	64	128	512
Hardware Specification					
Processor	1 x Intel 6-core CPU	1 x Intel 8-core CPU	2 x Intel 18 Core CPU	1 x Intel 36-core CPU	2 x Intel 36-core CPU
Memory	16GB (Up to 32GB)	16GB (Up to 64GB)	64GB (Up to 256GB)	192GB (Up to 384 GB)	512GB
Storage	SSD (2 backup SSDs)				
Hardware Acceleration	Software	ASIC	ASIC	ASIC	ASIC
Management Ports	Ethernet Management Port, RJ-45 Console Port				
Default Network Interfaces	2 x 1GbE Copper Management				
Pluggable Modules	Quad-Port 1GbE Copper 8 Port 1GbE Copper Quad-Port 1GbE Fiber 8 Port 1GbE Fiber	Quad-Port 1GbE Copper 8 Port 1GbE Copper Quad-Port 1GbE Fiber 8 Port 1GbE Fiber Dual-Port 10GbE Fiber (SFP+) Quad-Port 10GbE Fiber (SFP+)	Quad-Port 1GbE Copper 8 Port 1GbE Copper Quad-Port 1GbE Fiber 8 Port 1GbE Fiber Dual-Port 10GbE Fiber (SFP+) Quad-Port 10GbE Fiber (SFP+) Fiber (SFP+) Dual-Port 25GbE Fiber (SFP28) Dual-Port 40GbE Fiber (QSFP+) Dual-Port 100GbE Fiber (QSFP+)	Dual-Port 10GbE Fiber (SFP+) Quad-Port 10GbE Fiber (SFP+) Dual-Port 25GbE Fiber (SFP28) Dual-Port 40GbE Fiber (QSFP+) Dual-Port 100GbE Fiber (QSFP+)	Dual-Port 10GbE Fiber (SFP+) Quad-Port 10GbE Fiber (SFP+) Dual-Port 25GbE Fiber (SFP28) Dual-Port 40GbE Fiber (QSFP+) Dual-Port 100GbE Fiber (QSFP+) Dual-Port 400GbE (QSFP-DD)
Dimensions	500mm (W) x 440mm (D) x 50mm (H)	500mm (W) x 440mm (D) x 50mm (H)	500mm(W) x 600 mm(D) x 88mm(H)	500mm(W) x 600 mm(D) x 88mm(H)	500mm(W) x 600 mm(D) x 88mm(H)
Weight	10 kgs	10 kgs	20 kgs	25 kgs	28 kgs
Power Supply	Single Power Supply	Hot swap Dual Power Supply			
Cooling Fan	Fans	Hot swap Fans			
Rails	Nil	Sliding Rails			
Operating Environment	Temperature: 0-40 °C (32-104 °F) Humidity: 5% to 95%				

All PacketController Hardware Appliances support N+M active-standby/active-active clustering deployment. The specifications, performance numbers are subject to change without notice, and may vary depending on configuration and environmental conditions.